

TUBI "GY"

Tubo rinforzato con barriera a bassa permeabilità e rivestimento in gomma colorata


SAE J2196 - SAEJ2888

Oltre ai modelli sotto elencati, i tubi possono essere forniti di qualsiasi lunghezza e con qualsiasi configurazione degli attacchi.



Caratteristiche tecniche

Conforme a	SAE J2196/R134a SAE J2888/R1234yf
Pressione d'esercizio	5,6 MPa
Pressione di scoppio	28 MPa
Temperatura di lavoro	-40 ÷ +120°C

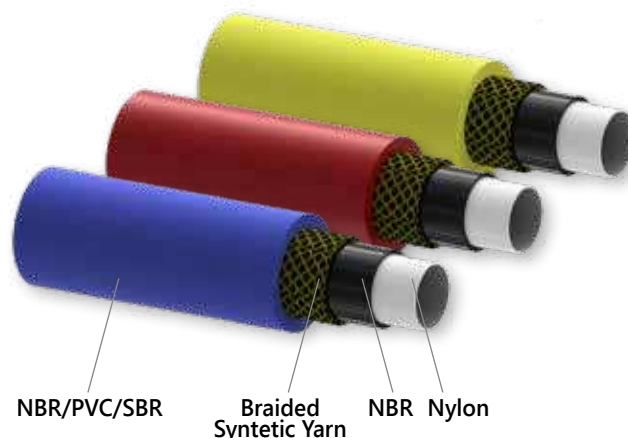

Attacchi a richiesta

1/2"-16ACME x 1/2"-16ACME
1/2"-16ACME x M14x1.5
M12x1.5 x M12x1.5

Serie 3 tubi flessibili con valvola intermedia, attacchi diritto x 45° con depressore in blister


Codice	Modello	Lunghezza	Attacchi	Dimensioni	Peso
06080013	3GYSA/5-5/32V4/BRY	900 mm	5/16" SAE	250 x 250 x 50 mm	0,8 kg
06080010	3GYSA/5-5/56V4/BRY	1500 mm	5/16" SAE	250 x 250 x 50 mm	0,8 kg



5/16"

Serie 3 tubi flessibili, attacchi diritto x 45° con depressore in blister

Codice	Modello	Lunghezza	Attacchi	Dimensioni	Peso
06080005	3GYSA/5-5/36/BRY	900 mm	5/16" SAE	250 x 250 x 50 mm	0,8 kg
06080006	3GYSA/5-5/48/BRY	1200 mm	5/16" SAE	250 x 250 x 50 mm	0,8 kg
06080007	3GYSA/5-5/60/BRY	1500 mm	5/16" SAE	250 x 250 x 50 mm	0,8 kg

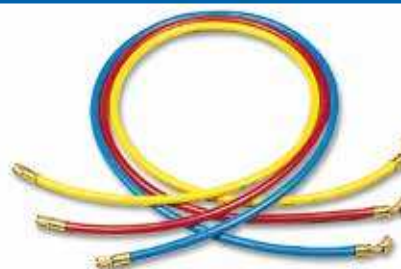

5/16"

Serie 3 tubi flessibili con valvola intermedia, attacchi diritto x 45° con depressore in blister


Codice	Modello	Lunghezza	Attacchi	Dimensioni	Peso
06080014	3GYSA/4-4/32V4/BRY	900 mm	1/4" SAE	250 x 250 x 50 mm	0,8 kg
06080009	3GYSA/4-4/56V4/BRY	1500 mm	1/4" SAE	250 x 250 x 50 mm	0,8 kg



1/4"

Serie 3 tubi flessibili, attacchi diritto x 45° con depressore in blister

Codice	Modello	Lunghezza	Attacchi	Dimensioni	Peso
06080001	3GYSA/4-4/36/BRY	900 mm	1/4" SAE	250 x 250 x 50 mm	0,8 kg
06080002	3GYSA/4-4/48/BRY	1200 mm	1/4" SAE	250 x 250 x 50 mm	0,8 kg
06080003	3GYSA/4-4/60/BRY	1500 mm	1/4" SAE	250 x 250 x 50 mm	0,8 kg
06080004	3GYSA/4-4/72/BRY	1800 mm	1/4" SAE	250 x 250 x 50 mm	0,8 kg

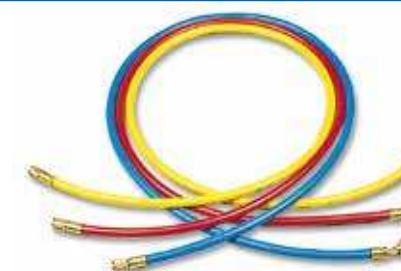

1/4"

TUBI "GY"



Per scelta colore,
aggiungere alla fine
del codice:

001

002

003

Tubi flessibili con valvola intermedia, attacchi diritto x 45° con depressore

Codice	Modello	Lunghezza	Attacchi	Dimensioni	Peso
06072036	GYSA/5-5/32V4	900 mm	5/16" SAE	250 x 250 x 50 mm	0,4 kg
06072013	GYSA/5-5/56V4	1500 mm	5/16" SAE	250 x 250 x 50 mm	0,4 kg
06072037	GYSA/5-5/68V4	1800 mm	5/16" SAE	250 x 250 x 50 mm	0,4 kg
06072038	GYSA/4-4/32V4	900 mm	1/4" SAE	250 x 250 x 50 mm	0,4 kg
06072012	GYSA/4-4/56V4	1500 mm	1/4" SAE	250 x 250 x 50 mm	0,4 kg
06072039	GYSA/4-4/68V4	1800 mm	1/4" SAE	250 x 250 x 50 mm	0,4 kg



Per scelta colore,
aggiungere alla fine
del codice:

001

002

003

Tubi flessibili, attacchi diritto x 45° con depressore

Codice	Modello	Lunghezza	Attacchi	Dimensioni	Peso
06072004	GYSA/5-5/36	900 mm	5/16" SAE	250 x 250 x 50 mm	0,4 kg
06072005	GYSA/5-5/60	1500 mm	5/16" SAE	250 x 250 x 50 mm	0,4 kg
06072006	GYSA/5-5/72	1800 mm	5/16" SAE	250 x 250 x 50 mm	0,4 kg
06072001	GYSA/4-4/36	900 mm	1/4" SAE	250 x 250 x 50 mm	0,4 kg
06072002	GYSA/4-4/60	1500 mm	1/4" SAE	250 x 250 x 50 mm	0,4 kg
06072003	GYSA/4-4/72	1800 mm	1/4" SAE	250 x 250 x 50 mm	0,4 kg



Per scelta colore,
aggiungere alla fine
del codice:

001

002

003

Tubi flessibili con valvola finale, attacchi diritto x diritto con depressore

Codice	Modello	Lunghezza	Attacchi	Dimensioni	Peso
06077004	V/GYSS/5-5/36	900 mm	5/16" SAE	250 x 250 x 50 mm	0,4 kg
06077005	V/GYSS/5-5/60	1500 mm	5/16" SAE	250 x 250 x 50 mm	0,4 kg
06077006	V/GYSS/5-5/72	1800 mm	5/16" SAE	250 x 250 x 50 mm	0,4 kg
06077001	V/GYSS/4-4/36	900 mm	1/4" SAE	250 x 250 x 50 mm	0,4 kg
06077002	V/GYSS/4-4/60	1500 mm	1/4" SAE	250 x 250 x 50 mm	0,4 kg
06077003	V/GYSS/4-4/72	1800 mm	1/4" SAE	250 x 250 x 50 mm	0,4 kg



Per scelta colore,
aggiungere alla fine
del codice:

001

002

003

Tubi flessibili, attacchi "diritto diritto"

Codice	Modello	Lunghezza	Attacchi	Dimensioni	Peso
06071007	GYSS/5-5/36	900 mm	5/16" SAE	250 x 250 x 50 mm	0,4 kg
06071008	GYSS/5-5/60	1500 mm	5/16" SAE	250 x 250 x 50 mm	0,4 kg
06071009	GYSS/5-5/72	1800 mm	5/16" SAE	250 x 250 x 50 mm	0,4 kg
06071001	GYSS/4-4/36	900 mm	1/4" SAE	250 x 250 x 50 mm	0,4 kg
06071002	GYSS/4-4/60	1500 mm	1/4" SAE	250 x 250 x 50 mm	0,4 kg
06071003	GYSS/4-4/72	1800 mm	1/4" SAE	250 x 250 x 50 mm	0,4 kg
06071036	GYSS/6-6/36	900 mm	3/8" SAE	250 x 250 x 50 mm	0,4 kg
06071055	GYSS/6-6/60	1500 mm	3/8" SAE	250 x 250 x 50 mm	0,4 kg
06071076	GYSS/6-6/72	1800 mm	3/8" SAE	250 x 250 x 50 mm	0,4 kg

Tubi flessibili, attacchi diritto x 90° con depressore

Codice	Modello	Lunghezza	Attacchi	Dimensioni	Peso
06073004	GYSL/5-5/36	900 mm	5/16" SAE	250 x 250 x 50 mm	0,4 kg
06073005	GYSL/5-5/60	1500 mm	5/16" SAE	250 x 250 x 50 mm	0,4 kg
06073006	GYSL/5-5/72	1800 mm	5/16" SAE	250 x 250 x 50 mm	0,4 kg
06073001	GYSL/4-4/36	900 mm	1/4" SAE	250 x 250 x 50 mm	0,4 kg
06073002	GYSL/4-4/60	1500 mm	1/4" SAE	250 x 250 x 50 mm	0,4 kg
06073003	GYSL/4-4/72	1800 mm	1/4" SAE	250 x 250 x 50 mm	0,4 kg

Per scelta colore,
aggiungere alla fine
del codice:


Tubi flessibili con valvola maschio, attacchi diritto x 45° con depressore

Codice	Modello	Lunghezza	Attacchi	Dimensioni	Peso
06078002	V/GYSA/5M-5/6	150 mm	5/16" SAE	250 x 250 x 50 mm	0,4 kg
06078001	V/GYSA/4M-4/6	150 mm	1/4" SAE	250 x 250 x 50 mm	0,4 kg

Per scelta colore, aggiungere alla fine del codice:


Tubi flessibili, attacchi 1/4"SAE F 90° x 1/4"SAE M con depressore

Codice	Modello	Lunghezza	Attacchi	Dimensioni	Peso
06073013	GYSL/4M-4/6	150 mm	1/4" SAE	250 x 250 x 50 mm	0,4 kg
06073014	GYSL/4M-4/12	300 mm	1/4" SAE	250 x 250 x 50 mm	0,4 kg
06073015	GYSL/4M-4/24	600 mm	1/4" SAE	250 x 250 x 50 mm	0,4 kg

Per scelta colore, aggiungere alla fine del codice:


Ricambi e accessori per HD e GY


Rif	Codice	Modello	Descrizione	
A	14020014001	G19020	Kit (10pz) guarnizioni per tubi 1/4"SAE, 1/2"-16ACME in NBR	10
	14020048001	G19516	Kit (10pz) guarnizioni per tubi 5/16"SAE	10
B	14023001001	D19302	Kit (10pz) depressori per tubi 1/4" SAE e 5/16"SAE	10
C	14020015001	G19030	Kit (10pz) guarnizioni per tubi 3/8"SAE	10
D	14020071001	G19020/T	Kit (10pz) guarnizioni per tubi 1/4"SAE, 1/2"-16ACME in PTFE	10
E	08008059	LOCK-VALVE-CARE	Utensile per semplice sostituzione guarnizioni in Lock Valve, EW e tubi flessibili	-
F	08008065	LOCK-VALVE-CARE-WIG	Espositore con 10 pz di LOCK-VALVE-CARE	10

"GY" HOSES

Reinforced hose with low permeability barrier and coloured rubber coating SAE J2196 - SAEJ2888

In addition to the models mentioned below, hoses of any length and with any type of connection can be delivered.



Technical features

In accordance with	SAE J2196/R134a SAE J2888/R1234yf
Working pressure	5,6 MPa
Bursting pressure	28 MPa
Working temperature	-40 +120°C



Connections on demand

1/2"-16ACME x 1/2"-16ACME
1/2"-16ACME x M14x1.5
M12x1.5 x M12x1.5

Kit of 3 flexible hoses with intermediate valve, connections straight x 45° with depressor with blister

Code	Model	Length	Connections	Dimensions	Weight
06080013	3GYS/5-5/32V4/BRY	900 mm	5/16" SAE	250 x 250 x 50 mm	0,8 kg
06080010	3GYS/5-5/56V4/BRY	1500 mm	5/16" SAE	250 x 250 x 50 mm	0,8 kg



5/16"

Kit of 3 flexible hoses, connections straight x 45° with depressor with blister

Code	Model	Length	Connections	Dimensions	Weight
06080005	3GYS/5-5/36/BRY	900 mm	5/16" SAE	250 x 250 x 50 mm	0,8 kg
06080006	3GYS/5-5/48/BRY	1200 mm	5/16" SAE	250 x 250 x 50 mm	0,8 kg
06080007	3GYS/5-5/60/BRY	1500 mm	5/16" SAE	250 x 250 x 50 mm	0,8 kg



5/16"

Kit of 3 flexible hoses, connections straight x 45° with depressor with blister

Code	Model	Length	Connections	Dimensions	Weight
06080014	3GYS/4-4/32V4/BRY	900 mm	1/4" SAE	250 x 250 x 50 mm	0,8 kg
06080009	3GYS/4-4/56V4/BRY	1500 mm	1/4" SAE	250 x 250 x 50 mm	0,8 kg



1/4"

Kit of 3 flexible hoses, connections straight x 45° with depressor with blister

Code	Model	Length	Connections	Dimensions	Weight
06080001	3GYS/4-4/36/BRY	900 mm	1/4" SAE	250 x 250 x 50 mm	0,8 kg
06080002	3GYS/4-4/48/BRY	1200 mm	1/4" SAE	250 x 250 x 50 mm	0,8 kg
06080003	3GYS/4-4/60/BRY	1500 mm	1/4" SAE	250 x 250 x 50 mm	0,8 kg
06080004	3GYS/4-4/72/BRY	1800 mm	1/4" SAE	250 x 250 x 50 mm	0,8 kg



1/4"

"GY" HOSES

For colour choice,
add to the end
of the code:



Flexible hoses with intermediate valve, connections straight x 45° with depressor

Code	Model	Length	Connections	Dimensions	Weight
06072036	GYSA/5-5/32V4	900 mm	5/16" SAE	250 x 250 x 50 mm	0,4 kg
06072013	GYSA/5-5/56V4	1500 mm	5/16" SAE	250 x 250 x 50 mm	0,4 kg
06072037	GYSA/5-5/68V4	1800 mm	5/16" SAE	250 x 250 x 50 mm	0,4 kg
06072038	GYSA/4-4/32V4	900 mm	1/4" SAE	250 x 250 x 50 mm	0,4 kg
06072012	GYSA/4-4/56V4	1500 mm	1/4" SAE	250 x 250 x 50 mm	0,4 kg
06072039	GYSA/4-4/68V4	1800 mm	1/4" SAE	250 x 250 x 50 mm	0,4 kg



For colour choice,
add to the end
of the code:



Flexible hose, connections straight x 45° with depressor

Code	Model	Length	Connections	Dimensions	Weight
06072004	GYSA/5-5/36	900 mm	5/16" SAE	250 x 250 x 50 mm	0,4 kg
06072005	GYSA/5-5/60	1500 mm	5/16" SAE	250 x 250 x 50 mm	0,4 kg
06072006	GYSA/5-5/72	1800 mm	5/16" SAE	250 x 250 x 50 mm	0,4 kg
06072001	GYSA/4-4/36	900 mm	1/4" SAE	250 x 250 x 50 mm	0,4 kg
06072002	GYSA/4-4/60	1500 mm	1/4" SAE	250 x 250 x 50 mm	0,4 kg
06072003	GYSA/4-4/72	1800 mm	1/4" SAE	250 x 250 x 50 mm	0,4 kg



For colour choice,
add to the end
of the code:



Flexible hose with final valve, connections straight x straight with depressor

Code	Model	Length	Connections	Dimensions	Weight
06077004	V/GYSS/5-5/36	900 mm	5/16" SAE	250 x 250 x 50 mm	0,4 kg
06077005	V/GYSS/5-5/60	1500 mm	5/16" SAE	250 x 250 x 50 mm	0,4 kg
06077006	V/GYSS/5-5/72	1800 mm	5/16" SAE	250 x 250 x 50 mm	0,4 kg
06077001	V/GYSS/4-4/36	900 mm	1/4" SAE	250 x 250 x 50 mm	0,4 kg
06077002	V/GYSS/4-4/60	1500 mm	1/4" SAE	250 x 250 x 50 mm	0,4 kg
06077003	V/GYSS/4-4/72	1800 mm	1/4" SAE	250 x 250 x 50 mm	0,4 kg



For colour choice,
add to the end
of the code:



Flexible hoses, connections "straight - straight"

Code	Model	Length	Connections	Dimensions	Weight
06071007	GYSS/5-5/36	900 mm	5/16" SAE	250 x 250 x 50 mm	0,4 kg
06071008	GYSS/5-5/60	1500 mm	5/16" SAE	250 x 250 x 50 mm	0,4 kg
06071009	GYSS/5-5/72	1800 mm	5/16" SAE	250 x 250 x 50 mm	0,4 kg
06071001	GYSS/4-4/36	900 mm	1/4" SAE	250 x 250 x 50 mm	0,4 kg
06071002	GYSS/4-4/60	1500 mm	1/4" SAE	250 x 250 x 50 mm	0,4 kg
06071003	GYSS/4-4/72	1800 mm	1/4" SAE	250 x 250 x 50 mm	0,4 kg
06071036	GYSS/6-6/36	900 mm	3/8" SAE	250 x 250 x 50 mm	0,4 kg
06071055	GYSS/6-6/60	1500 mm	3/8" SAE	250 x 250 x 50 mm	0,4 kg
06071076	GYSS/6-6/72	1800 mm	3/8" SAE	250 x 250 x 50 mm	0,4 kg

3/8 hoses without depressor.

Flexible hoses, connections straight x 90° with depressor

Code	Model	Length	Connections	Dimensions	Weight
06073004	GYSL/5-5/36	900 mm	5/16" SAE	250 x 250 x 50 mm	0,4 kg
06073005	GYSL/5-5/60	1500 mm	5/16" SAE	250 x 250 x 50 mm	0,4 kg
06073006	GYSL/5-5/72	1800 mm	5/16" SAE	250 x 250 x 50 mm	0,4 kg
06073001	GYSL/4-4/36	900 mm	1/4" SAE	250 x 250 x 50 mm	0,4 kg
06073002	GYSL/4-4/60	1500 mm	1/4" SAE	250 x 250 x 50 mm	0,4 kg
06073003	GYSL/4-4/72	1800 mm	1/4" SAE	250 x 250 x 50 mm	0,4 kg

For colour choice,
add to the end
of the code:



Flexible hose with male valve, connections straight x 45° with depressor

Code	Model	Length	Connections	Dimensions	Weight
06078002	V/GYSA/5M-5/6	150 mm	5/16" SAE	250 x 250 x 50 mm	0,4 kg
06078001	V/GYSA/4M-4/6	150 mm	1/4" SAE	250 x 250 x 50 mm	0,4 kg

For colour choice, add to the end of the code:



Flexible hose, connections 1/4"SAE F 90° x 1/4"SAE M with depressor

Code	Model	Length	Connections	Dimensions	Weight
06073013	GYSL/4M-4/6	150 mm	1/4" SAE	250 x 250 x 50 mm	0,4 kg
06073014	GYSL/4M-4/12	300 mm	1/4" SAE	250 x 250 x 50 mm	0,4 kg
06073015	GYSL/4M-4/24	600 mm	1/4" SAE	250 x 250 x 50 mm	0,4 kg

For colour choice, add to the end of the code:



Spare parts for HD and GY



Ref	Code	Model	Description	
A	14020014001	G19020	Kit (10 pcs) gaskets for 1/4"SAE, 1/2"-16ACME in NBR	10
	14020048001	G19516	Kit (10 pcs) gaskets for 5/16"SAE	10
B	14023001001	D19302	Kit (10pcs) valve openers for 1/4" SAE and 5/16" SAE hoses	10
C	14020015001	G19030	Kit (10 pcs) gaskets for 3/8" SAE hoses	10
D	14020071001	G19020/T	kit (10pcs) PTFE gaskets for 1/4" SAE, 1/2"-16ACME hoses	10
E	08008059	LOCK-VALVE-CARE	Gaskets easy replacement tool for LOCK-VALVE, EW and flexible hoses	-
F	08008065	LOCK-VALVE-CARE-WIG	Counter display with 10 pcs of LOCK-VALVE-CARE	10